

UT681 HDMI HDMI Cable Tester User Manual

Note: Before using this instrument, please read and understand the instructions


- The instrument can not be used to test the network cable, telephone cable that is in working state . otherwise it will damage the instrument and equipment being connected by the cable
- When low voltage indication appears , please replace the 9V battery. (Note: Power input to the device cannot be greater than 12VDC).
- If do not use this instrument for a long time, please take out the battery to prevent the leakage of liquid to protect the instrument.
- The meaning of the symbols of this instrument is as follow
CE: Meets the European Community (European Union) standard
- Application standards: EN61326-1: 2013; EN61326-2-2:2013

I. Instrument function introduction

UT681 HDMI is a professional tester for testing HD cable (HDMI 1.2V/1.3V/1.4V/2.0V).

It can quickly scan and test up to 19 wires and decide which one is short circuit, open circuit, or in wrong order.

1. Test mode: a) fast scan mode b) full display mode
2. The type of the HD cable to be tested
 - a. Both ends are standard HDMI connectors (Type A - Type A)
 - b. Both ends are HDMI Mini connectors (Type C - Type C)
 - c. One end is HDMI connector, one end is HDMI Mini connector (Type A - Type C)
3. Battery low voltage test: when the battery voltage is lower than about 7.2V, the blue light flashes, prompting to replace the battery
4. Auto shut down function: when no operation during the last 10 minutes, the instrument will automatically shut down.

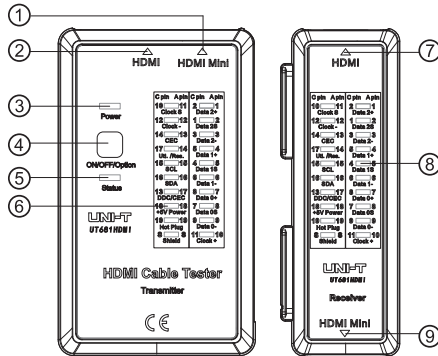

1	Transmitter HDMI Mini (Type C) interface
2	Transmitter HDMI standard (Type A) interface
3	Transmitter power indicator
4	Transmitter power ON/OFF and Function switch key
5	Transmitter analog status indicator
6	Transmitter alignment indicator
7	Receiver HDMI standard (Type A) interface
8	Receiver alignment indicator
9	Receiver HDMI Mini (Type C) interface

II. Test method of the instrument


1. Method for UT681HDMI to test HD cable:

Firstly install the 9V battery, short press the ON/OFF/Option key for 0.5 seconds to start up, the indicator flashes immediately. Long press ON/OFF/Option key for 2 seconds to shut down .
At the Power ON state, short press the ON/OFF/Option key to switch between scan mode and full display mode. The state indicator flashing style is to identify which mode is chosen.
The scan mode is used for specific defect detection. The full display mode is used for quick alignment detection.

2. Using HDMI standard interface (Type A - A)for example :

The two terminal heads of the HD data lines to be tested are respectively inserted into the HDMI ends of the transmitter and the receiver.

- a. If the cable is error free:
The scan mode: the alignment indicators of the transmitter and receiver will be synchronized from 1 to 19 one by one.
Full display mode: the alignment indicators of the transmitter and receiver light with the same brightness (It is normal that the indicator brightness in scan mode is a little higher than that in the full display).
- b. If a short circuit is detected, the corresponding indicator of the transmitter will light up, the corresponding indicator of the Receiver will not light up.
- c. If an open circuit is detected, both the corresponding indicator of the transmitter and receiver will not light up.
- d. If two or more lines are crossing, in wrong sequence or order, both corresponding indicators of the transmitter and receiver will light up, but they will not be synchronized. Long press the ON/OFF/Option key for 2 seconds to shut down.

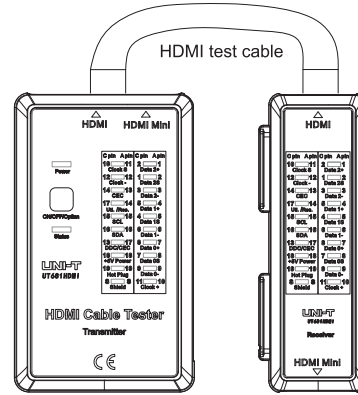

III. Product specification

- Working environment: working temperature: 0~40℃
- Storage temperature: -10~50℃
- Working humidity: 20~80% RH
- Storage humidity: 10~90% RH
- Altitude: less than 2000 meters
- Dimensions: Transmitter: 102 mm x 62 mm x 29mm
Receiver: 102 mm x 37 mm x 28mm
- Product weight: Transmitter about 78g (bare metal):
Receiver: about 51g (bare metal)

IV. Packing list

1. Transmitter ----- 1PCS
2. Receiver ----- 1 PCS
3. 9V Battery ----- 1 PCS
4. Manual Book ----- 1 PCS

V. Replace Battery

At the Power Off state :

1. Remove the battery cover and the old battery.
2. Install the new battery with correct polarity.
3. Close the battery cover and tighten with screws.

VI. Maintenance and Clean.

Clean the instrument with a dry soft cloth to avoid moisture. Do not use the agents or other chemicals to clean the unit . This product has passed the strict quality inspection before leaving the factory. If found damages not caused by misuse or vandalism in the course of using , Please contact after-sale service, Do not disassemble to repair it privately .

Manufacturer:

Uni-Trend Technology (China) Limited
No 6, Gong Ye Bei 1st Road
Songshan Lake National High-Tech Industrial
Development Zone, Dongguan City
Guangdong Province
China
Postal Code:523 808

Headquarters:
Uni-Trend Group Limited
Rm901, 9/F, Nanyang Plaza
57 Hung To Road
Kwun Tong
Kowloon, Hong Kong
Tel: (852) 2950 9168
Fax: (852) 2950 9303
<http://www.uni-trend.com>